


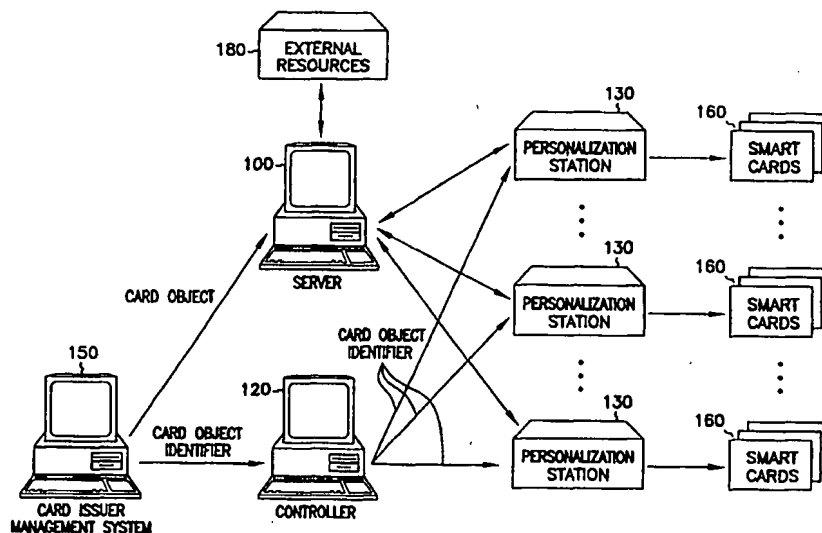

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G07F 7/10	A1	(11) International Publication Number: WO 99/59109 (43) International Publication Date: 18 November 1999 (18.11.99)
(21) International Application Number: PCT/US99/10328 (22) International Filing Date: 11 May 1999 (11.05.99) (30) Priority Data: 09/076,022 11 May 1998 (11.05.98) US (71) Applicant: UBIQ INCORPORATED [US/US]; 10925 Bren Road East, Minnetonka, MN 55343 (US). (72) Inventors: GOMAN, Robert, Neal; 5428-45th Avenue South, Minneapolis, MN 55417 (US). BURAND, Denis, c.; 200 Second Street, Excelsior, MN 55331 (US). YOUNGER, Thomas, L.; 17701 Breconwood Road, Wayzata, MN 55391 (US). (74) Agent: VIKSNINS, Ann, S.; Schwegman, Lundberg, Woessner & Kluth, P.O. Box 2938, Minneapolis, MN 55402 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: SMART CARD PERSONALIZATION IN A MULTISTATION ENVIRONMENT**(57) Abstract**

A smart card personalization system provides an interface to smart card personalization stations and to external computing or data resources which normally are not available directly to personalization station. A card issuer management system prepares card objects and assigns a unique card object identifier. A smart card personalization server receives the card objects from the card issuer management system. A smart card personalization controller receives the unique card object identifiers and routes the card object identifiers to waiting personalization stations. The personalization stations use the card object identifier to request data and services from the smart card personalization server in order to personalize the smart card. The services provided by the smart card personalization server includes data services, security services and support services. The smart card personalization server supports multiple active personalization station sessions.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Smart Card Personalization in a Multistation Environment

5 Field of the Invention

The present invention relates generally to data storage devices and more specifically to the control of smart card personalization in a multistation environment.

Background of the Invention

10 Increasing numbers of organizations which issue transaction cards to their users, customers, or employees require cards tailored to meet the requirements of their particular service or application. These organizations also want the cards to contain data about the cardholder. Existing transaction cards encode such data in a magnetic stripe on the back of the card but the amount of
15 data that can be held by a magnetic stripe is limited. A new type of transaction card embeds a microprocessor computer chip in the plastic of the card to greatly increase the card's data storage capacity. Additionally, sophisticated card applications specific to the card issuer can execute in certain varieties of the chips, and the chip may also contain a type of operating system. Transaction
20 cards with embedded chips are referred to in the industry as portable programmed data carriers, more commonly called "smart cards." The chip in a smart card is generally programmed with initialization and/or personalization data at the same time as the surface of the card is being embossed and/or printed.

The initialization data comprises three major types of information:
25 application data, security data, and printed data. The application data is common to all cards for a given card application and includes application program code and variables. The security data prevents fraudulent use of the card and is usually provided in the form of "secure keys." Printed data, such as a logo, bar codes, and various types of numerical information, are placed on the surface of
30 the card. Some or all of the same data can also be embossed on the surface.

Optical technology also can be employed to make part or all of the surface of the card into a storage medium with data accessible by an appropriate optical reader.

Smart cards are also programmed with information specific to an individual cardholder through a process called "personalization." The

personalization information for a smart card is similar to the personalization information currently contained on non-smart cards, such as the cardholder's name, account number, card expiration date, and a photograph. Because of its increased storage capacity, the chip in a smart card can contain additional data
5 beyond the basic information on the standard transaction card including a graphical representation of the individual's signature, data defining the types of service the cardholder is entitled to, and account limits for those services.

Current systems from performing smart card initialization and/or personalization include a controller or a personal computer which is connected to
10 a personalization station. All of the smart card programming data required for the personalization process is sent from the controller or personal computer to the personalization station which programs the smart card. An application running on the personalization station controls the programming of the smart card. Many current personalization stations have a limited capacity to handle the
15 increasingly sophisticated personalization process as the size and functionality of smart card computer chips increase. Such limitations include the memory, processing capacity, and buffer size of the personalization stations.

In addition, personalization stations may require access to external resources which provide security services or access to card data. The external
20 resources, particularly the security services, are expensive infrastructures to repeat for each personalization station. Also, communication between the personalization station and the external resource is limited by the speed of the communication link between them. In addition, the application development environment available on the personalization stations is often unique and lacking
25 in development tools.

Therefore, there is a need for a personalization system which overcomes the limitations on memory capacity and processing flexibility of current personalization stations. There is also a need for a personalization system which can share external resources between multiple personalization stations.

30 **Summary of the Invention**

The above-identified shortcomings as well as other shortcomings are addressed by the present invention, which will be understood by reading and studying the following specification. The invention is a computerized system for

controlling programming of portable programmed data carriers across a plurality of personalization stations. The system includes a personalization server interface for acquiring services from one of more resources, transferring card information to one of the personalization stations and controlling the

5 programming of the portable programmed data carrier. The system also includes a personalization station interface for receiving the card information from the personalization server interface and for programming the portable programmed data carrier.

The invention also described is a method of controlling programming of

10 portable programmed data carriers in a system having a plurality of programming stations. The method includes receiving one or more card objects from a card issuer management system. The card objects consist of information for programming the portable programmed data carriers. The method also includes receiving a programming request from the programming station and

15 utilizing the card object to control the programming station as the programming station programs the portable programmed data carrier.

Alternatively, the invention described is a computerized system which includes a means for receiving one or more card objects from a card issuer management system. The computerized system also includes a means for

20 receiving a programming request from the programming station and a means for utilizing the card object to control the programming station as the programming station programs the portable programmed data carrier.

The smart card personalization system uses a data structure comprising a data field representing a card object containing information for programming a

25 portable programmed data carrier and an additional data field containing a unique card object identifier for identifying the card object.

Therefore, the smart card personalization system of the present invention shares external resources between multiple personalization stations. Other aspects and advantages of the invention will become apparent by reference to the

30 drawings and by reading the following detailed description.

Brief Description of the Drawings

- Figure 1 is a block diagram representing an embodiment of a smart card issuing process that incorporates a smart card personalization server of the present invention.
- 5 Figure 2 is a functional block diagram of input and output connections for the embodiment of the smart personalization server of shown in Figure 1.
- Figure 3 is a block diagram showing one embodiment of the smart card personalization software of the present invention.
- 10 Figure 4 is a high level flow chart for one embodiment of software which implements the functions of the smart card personalization server.

Description of the Embodiments

In the following detailed description of the embodiments, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that structural, logical and electrical changes may be made without departing from the spirit and scope of the present inventions. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present inventions is defined only by the appended claims.

The leading digit(s) of reference numbers appearing in the Figures usually corresponds to the Figure number, with the exception that identical components which appear in multiple figures are identified by the same reference numbers.

The system of the present invention utilizes a personalization server to control smart card personalization in an environment having a plurality of personalization stations. The personalization server provides an interface to a plurality of card personalization stations and to external computing or data resources which normally are not directly available to the card personalization stations or which are not cost efficient to replicate at each card personalization station.

The detailed description of this invention is divided into four sections.

The first section provides an overview of one embodiment of a system for issuing smart cards which incorporates a smart card personalization server of the present invention. The second section describes the functional specifications for the software components of the example embodiment of the smart card personalization system. The third section illustrates an example communication sequence between personalization station interface software and personalization server software for a smart card personalization process. The fourth section is a conclusion which includes a summary of the advantages of the present invention.

10 **Smart Card Personalization System Overview.** Figure 1 illustrates components of a smart card issuing process that incorporates one embodiment of the smart card personalization server of the present invention. The smart card personalization server 100 receives card objects from a card issuer management system 150. A smart card personalization controller 120 receives, from the card issuer management system 150, a card object identifier for each one of the card objects passed to the smart card personalization server 100. The smart card personalization controller 120 routes each one of the card object identifiers to one of a plurality of personalization stations 130. Each personalization station 130 uses the card object identifier to request data and services from the smart card personalization server 100 in order to personalize a smart card 160.

The card issuer management system 150 manages the cardholder data and determines the type of card to issue, the card applications to embed in the card, and what personalization equipment to use to issue the card for a particular cardholder.

25 The smart card personalization server 100 is illustrated in Figure 1 as a computer executing personalization server software as further described below. The personalization server software executes under an operating system such as Unix, Windows 95®, or Windows NT®, and on industry-standard workstation and/or personal computer hardware. As described below, the smart card personalization server 100 provides an interface to card personalization stations 130 and to external computing or data resources 180.

The server 100 controls card printers, embossing devices, and integrated or add-on smart card interface devices collectively represented in Figure 1 as a

plurality of personalization stations 130. Personalization stations 130 also represent such devices as large volume card printer/embossers, small volume card printer/embossers, automatic teller machines (ATMs), point of sale terminals, unattended kiosks, personal computers, network computers, and on-line telecommunication devices. The physical connection between the devices and the smart card personalization server 100 varies according to the manufacturer and model of the device. Common industry standard connections include serial RS232, SCSI (Small Computer System Interface), Ethernet, and serial TTL (Transistor-Transistor Logic). In addition, some devices require a proprietary bus connection.

The connections between the smart card personalization server 100 and the card management system 150 and the stations 130 can also be implemented through standard local area networks, wide area networks, dedicated phone lines, or other remote communication infrastructure used to transfer data. Alternate connections will be apparent to those skilled in the art and are within the scope of the invention.

Figure 2 is a block diagram of one embodiment of the smart card personalization system illustrating the logical input and output connections for the smart card personalization server 100. The cardholder data 202 input and maintained by the card issuing organization contains information about each individual cardholder, such as name, account number, card expiration date, and applicable services. The card issuer management system 150 assembles the data necessary for each card personalization job. The data for each job can be stored in a card object data store, such as a database, with each card object 208 accessible by a unique card object identifier. A job can be, for example, a logical grouping of similar card objects.

The card objects 208 contain, for example but not with limitation, data and commands for magnetic stripe encoding, embossing, printing, packaging and smart card personalization. An example card object is shown below.

Card Object

EMB= "123456789", "Your Name", "1/1/1999"

ENC=%B123456789^ Y/Name^01011999?;123456789=01011999?

PIC=www.photos.com/YourName

5 SCRD=this_unique_card_object_identifier

The example card object begins with an emboss instruction "EMB" followed by the corresponding cardholder data to be embossed on the card. The second line in the example card object shown above is an encode instruction "ENC"

10 followed by the corresponding data to be corresponding cardholder data to be encoded on the magnetic strip of the card. The third line in the example card object is an instruction to print a picture on the card "PIC" followed by the location of the cardholder's picture. The fourth line in the example card object is smart card portion of the card object "SCRD". The smart card portion of the
15 card object 208 consists of the unique card object identifier.

The card issuer management system 150 passes the card object 208 to the smart card personalization server 100. The smart card personalization server 100 expects the personalization data to be in a particular format. Because the card object 208 is in a format defined by the card issuer that often differs from the
20 format(s) expected by the server 100, the card object 208 is translated by the server 100 when necessary. One method of translating the card object is described in U.S. Patent Application serial number 08/755,459 entitled "System and Apparatus for Smart Card Personalization", filed on November 22, 1996.

The smart card personalization server 100 provides an interface to
25 external security services 204 and additional data sources 206 as needed to perform a smart card personalization job. The software program for the smart card personalization server 100 can be coupled to the data sources 206 through standard data query commands that provide access to the data stored in the data sources. The communication protocols between the software program for the
30 smart card personalization server 100 and the external security services 204 and the data sources 206 vary depending upon the underlying data management system or security system employed.

The smart card personalization server 100 also provides an interface to each one of a plurality of card personalization stations 130. The smart card personalization controller 120 passes a card object identifier to one of the waiting personalization stations 130. The personalization station 130 presents
5 the card object identifier to the server 100 in order to initiate access to the data services, security services or support services needed to complete the smart card personalization. Upon receiving the card object identifier from the personalization station 130, the smart card personalization server 100 translates the card object indicated by the card object identifier. The translation of the card
10 object by the smart card personalization server 100 results in a sequence of commands and/or data which are passed to the personalization station 130. The personalization station 130 passes the commands and data received from the server 100 directly to the smart card 160. An example process demonstrating how the server 100 controls the actual card programming is described below.

15 **Personalization Software Specifications.** Figure 3 is a block diagram showing one embodiment of the smart card personalization server 100 of Figure 2. The system of the present invention utilizes the personalization server 100 to control smart card personalization in an environment having a plurality of personalization stations 130 coupled to the personalization server 100. The
20 personalization server 100 provides an interface to card personalization stations 130 and to external computing or data resources 204, 206 as shown in Figure 2.

An application executing on a card issuer management system 150 prepares a card object 303 and assigns a card object identifier to each object. Information regarding the card objects is archived in a card object database 302
25 until called upon by the personalization server 100 to personalize a smart card.

The personalization environment of the present invention comprises two complimentary software components. The first is personalization station interface software 304 which executes in a processor of the personalization station 130. The second is personalization server software 305 executing in a
30 processor in the personalization server 100 which processes the personalization card objects and utilizes both local and external resources.

A initialization process 306 initiates a personalization job by initiating the personalization server 100 and optionally sending data, such as embossing or

magnetic stripe encoding data, to the personalization station 130. The personalization server software 305 serves multiple card personalization processes 308. Each card personalization process 308 represents a personalization job occurring at one of the personalization stations 130. Each
5 card personalization process 308 is logically linked to one of the personalization stations 130.

The personalization station interface software 304 presents the unique card object identifier to the personalization server software 305 to initiate access to services available through the server software 305. The personalization server
10 software 305 obtains all of the necessary job information as well as the data elements to be used in personalization of the smart card. The personalization station interface software 304 performs the card personalization utilizing the services available to it through the personalization server software 305 as required until personalization is complete. At completion of the job, the
15 personalization station interface software 304 is notified by the server software 305 of completion.

The services provided by the server software 305 include data services 312, security services 310 and support services 314. The data services 312 perform the acquisition of data for each personalization job and include any
20 commonly available means of accessing data. The data services 312 retrieve data archived in the card object data base 302 on the card issuer management system 150 as well as from additional external data sources as shown in Figure 2. The data can be in the form of files, databases, or data structures for example.

The security services 310 interface with a variety of different external
25 sources which provide security functions. The security functions provided by the external sources include any commonly available means of securing information or limiting access to smart card chips until a required security condition is met. An example security function utilizes one or more "secure keys" that are programmed into the chip to prevent fraudulent use of the card.
30 The appropriate secure key data is obtained by the smart card personalization server software 305 from secure key records maintained by the card issuer or an external security source and then transferred to the personalization station interface software 304. The security services 310 also provide security functions

that can be used, for example, to ensure the integrity and secrecy of data during the transmission of data to and from the personalization station 130.

The support services 314 perform processing tasks that in prior systems were performed by the personalization station 130 or were unable to be performed at all due to the limitations of the personalization stations. The support services 314 include any commonly used functions that can be shared between processes such as data conversions and validations for example. An example support service 314 is year 2000 date validation processing. An additional example of a support service 314 is formatting a ten digit string of numbers representing a telephone number so that the area code is in parentheses.

The personalization server software 305 operates on a computer system which includes one or more high speed processors, data communications capability compatible with the target personalization stations, access to external resources such as security or file servers and a multitasking operating system. The smart card personalization processes 308, identified as components of the personalization server software 305, utilize their own virtual memory and share resources as appropriate through threading or other common techniques well known to one skilled in the art.

In summary, the personalization server software moves the processing tasks for initialization and personalization of smart cards from the personalization station to the personalization server. The personalization station interface software is responsible for servicing individual commands from the personalization server software.

Personalization Software Communication Process. Figure 4 illustrates the communication sequence between the personalization station interface software 304 and the personalization server software 305 in order to complete personalization of a smart card. The smart card personalization process begins at stage 402 when the personalization station interface software 304 receives a unique card object identifier from the smart card personalization controller as shown in Figure 2. At stage 404, the personalization station interface software 304 requests the commands and data necessary to personalize the card by passing the card object identifier to the server software 305. Upon receiving the card object identifier, the server software 305 starts a

personalization session with the personalization station interface software 304 at stage 406.

Based on the card object identifier, the server software 305 retrieves and sends the data and commands unique to the card being personalized to the
5 personalization station interface software 304 at stage 408. The data and commands are retrieved locally from the smart card personalization server or from additional external data sources as shown in Figure 2 including, for example, the card issuer management system 150.

In one embodiment, the personalization station interface software 304 is
10 idle at stage 410 until it receives the commands and data from the personalization server software 305. Upon receiving the commands and data, the personalization station interface software 304 passes the commands and data directly to the smart card and returns data and/or status signals to the server software 305 as an acknowledgement at stage 412. An example of the data
15 returned by the personalization station interface software 304 is a serial number unique to the card and a random number. The data in such case can be used as part of a function provided by a security service such as an authentication algorithm. At stage 414, the server software 305 processes the status signals and/or data returned by the personalization station interface software 304.

For example, at stage 408 the server software 305 sends a "select"
20 command. The personalization station interface software 304 is idle at stage 410 until it receives the "select" command from the server. At stage 412, the personalization station interface software 304 passes the "select" command on to the smart card and returns a status signal as an acknowledgement to the server software 305. After receiving the acknowledgment at stage 414, the server software 305 sends a "write" command and associated data to the personalization station interface software 304 at stage 408. The personalization station interface software 304 is idle at stage 410 until it receives the "write" command from the server software 305. At stage 412, the personalization station passes the "select"
30 command on to the smart card and returns a status signal as an acknowledgement to the server software 305. The loop from stage 408 to stage 410 to stage 412 to stage 414 continues until the personalization is complete.

Upon completion of the personalization of the smart card, the server software 305 sends a "format complete" command to the personalization station interface software 304 at stage 416. The personalization station interface software 304 is idle at stage 418 until it receives the "format complete" command from the server software 305. At stage 420 the personalization station interface software 304 sends an acknowledgement of the "format complete" command to the server software 305 and to the smart card. The personalization process is complete at stage 422 when the server software 305 receives the acknowledgement.

10 **Conclusion.** In summary, the system of the present invention utilizes a personalization server to control smart card personalization in an environment having a plurality of personalization stations. The personalization server provides an interface to a plurality of card personalization stations and to external computing or data resources which normally are not directly available to
15 the card personalization stations or which are not cost efficient to replicate at each card personalization station. The personalization server off-loads the processing of tasks for initialization and personalization of smart cards from the personalization station to the personalization server. The personalization station is responsible for servicing individual commands from the personalization
20 server.

An advantage of the present invention is that the personalization server can support multiple active personalization station sessions. An additional advantage is that the programming logic required in the personalization station is reduced to that of managing data transfers.

25 Other mechanisms for control of the smart card personalization process will be apparent to those skilled in the art. It is to be understood that the above description is intended to be illustrative, and not restrictive. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined
30 with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

What is claimed is:

1. A method of controlling programming of portable programmed data carriers in a system having a plurality of personalization stations, the method
5 comprising:
 - receiving a card object from a card issuer management system, wherein the card object consists of information for programming the portable programmed data carriers;
 - receiving a programming request from one of the personalization
10 stations; and
 - utilizing the card object to control the personalization station as the personalization station programs the portable programmed data carrier.
2. The method of claim 1, further comprising acquiring data from a data
15 source.
3. The method of claim 2, wherein the data source is the card issuer management system.
- 20 4. The method of claim 1, further comprising acquiring security services from a security source.
5. The method of claim 1, further comprising providing support services.
- 25 6. The method of claim 1, wherein receiving a programming request comprises:
 - receiving a card object identifier; and
 - associating the card object identifier with the card object.
- 30 7. The method of claim 2, further comprising acquiring security services from a security source.
8. The method of claim 7, further comprising providing support services.

9. The method of claim 8, wherein receiving a programming request comprises:

receiving a card object identifier; and
associating the card object with the card object identifier.

5

10. A computerized system for controlling programming of portable programmed data carriers across a plurality of personalization stations, the system comprising:

a personalization server interface for acquiring services from one of more
10 resources, transferring card information to one of the personalization stations, and controlling the programming of the portable programmed data carriers; and
a personalization station interface for receiving the card information from the personalization server interface and for programming one of the portable programmed data carriers.

15

11. The computerized system of claim 10, wherein the services acquired by the personalization server interface are data services.

12. The computerized system of claim 10, wherein the services acquired by
20 the personalization server interface are security services.

13. The computerized system of claim 10, wherein the services acquired by the personalization server interface are support services.

25 14. The computerized system of claim 10, further comprising a controller for receiving a card object identifier and for routing the card object identifier to one of the personalization stations.

15. A computerized system for controlling programming of portable
30 programmed data carriers across a plurality of personalization stations, the system comprising:

15

means for receiving one or more card objects from a card issuer management system, wherein the card objects comprise information for programming the portable programmed data carriers;

means for receiving a programming request from the personalization
5 station; and

means for utilizing the card object to control the personalization station as the personalization station programs the portable programmed data carrier.

16. The computerized system of claim 15, further comprising means for
10 acquiring security services from a security source.

17. The computerized system of claim 15, further comprising means for acquiring data from a data source.

15 18. The computerized system of claim 17, wherein the data source is the card issuer management system.

19. The computerized system of claim 15, further comprising means for providing support services.

20

20. The computerized system of claim 15, wherein the programming request comprises a unique card object identifier.

21. A computer-readable medium having computer-executable instructions
25 stored thereon for causing a computer to perform a method of controlling programming of portable programmed data carriers, the method comprising:

receiving one or more card objects from a card issuer management system, wherein the card objects consist of information for programming the portable programmed data carriers;

30 receiving a programming request from one of the personalization stations; and

utilizing the card object to control the personalization station as the personalization station programs the portable programmed data carrier.

22. The computer-readable medium of claim 21, having further computer-executable instructions for acquiring security services from a security source.
23. The computer-readable medium of claim 21, having further computer-executable instructions for acquiring data from a data source.
24. The computer-readable medium of claim 23, wherein the data source is the card issuer management system.
25. The computer-readable medium of claim 21, having further computer-executable instructions for providing support services.
26. A computer readable medium having stored thereon a data structure comprising:
- a first data field containing data representing a card object for programming a portable programmed data carrier; and
 - a second data field containing data representing a unique card object identifier for identifying the card object represented by the first data field.
27. A system for issuing portable programmed data carriers comprising:
- a plurality of card objects identified by a like plurality of card object identifiers;
 - a plurality of personalization stations for receiving the card object identifiers and for programming the portable programmed data carriers using information contained in the card object identified by the card object identifier;
 - a controller for providing to each personalization station the card object identifier; and
 - a personalization server for controlling the programming of a portable programmed data carrier in response to a request from one of the personalization stations, wherein the personalization server translates the card object into commands and data and transfers the commands and data to the personalization stations making the request.

28. The system of claim 27, wherein the personalization server acquire services from one or more resources in response to a request from one of the personalization stations.

- 5 29. A method of programming a portable programmed data carrier in a system having a server and a personalization station, the method comprising:
receiving, by the personalization station, a card object identifier;
requesting, by the personalization station, from the server, information
for programming the portable programmed data carriers; and
10 programming, by the personalization station, the portable programmed data carrier under the control of the server.

30. A method of controlling programming of portable programmed data carriers in a system having a server and a plurality of personalization stations,
15 the method comprising:
receiving, by the server, a card object from a card issuer management system, wherein the card object consists of information for programming the portable programmed data carriers;
receiving, by the server, a programming request from one of the
20 personalization stations; and
utilizing, by the server, the card object to control the personalization station as the personalization station programs the portable programmed data carrier.

- 25 31. The method of claim 30, further comprising acquiring data by the server from a data source.


32. The method of claim 31, wherein the data source is the card issuer management system.

30

33. The method of claim 30, further comprising acquiring security services by the server from a security source.

34. The method of claim 30, further comprising providing support services by the server.

35. The method of claim 30, wherein receiving, by the server, a
5 programming request comprises:
receiving a card object identifier; and
associating the card object identifier with the card object.

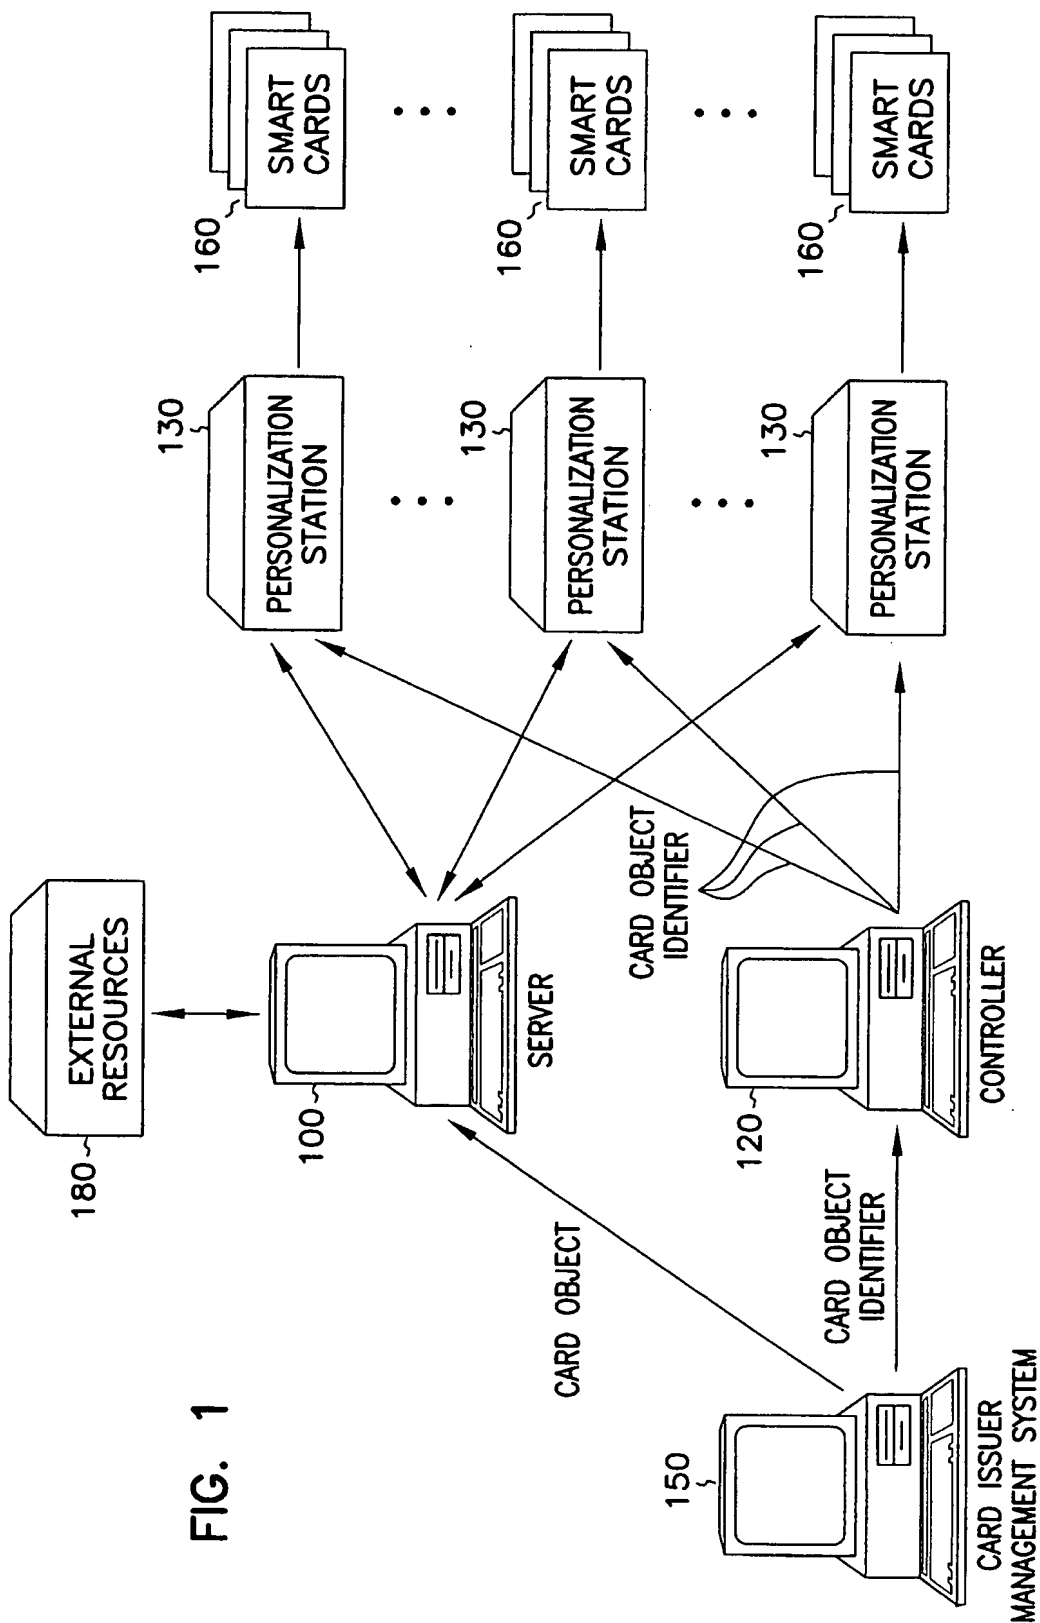

2 / 4

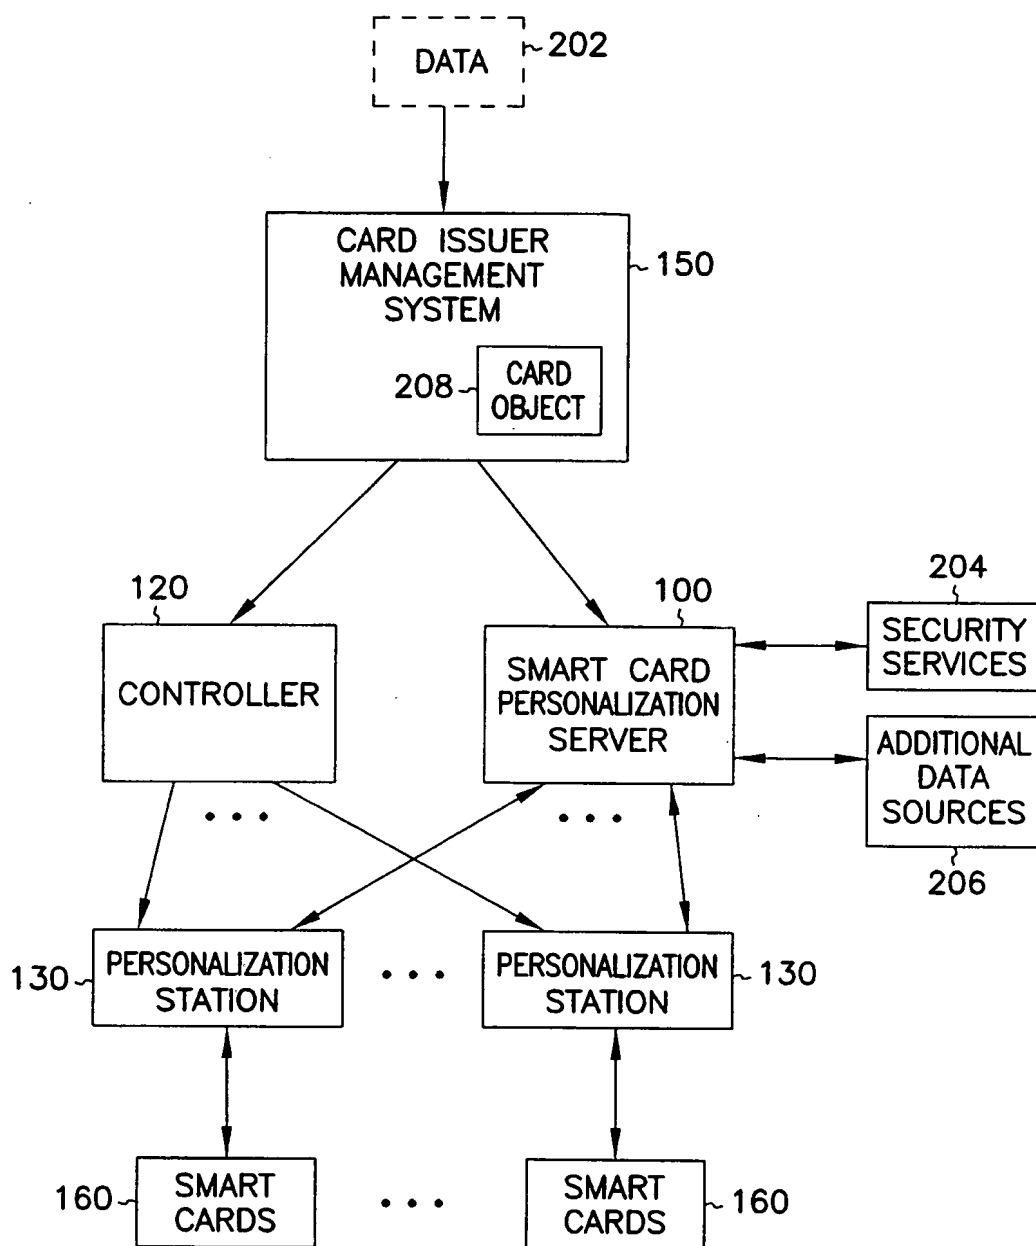
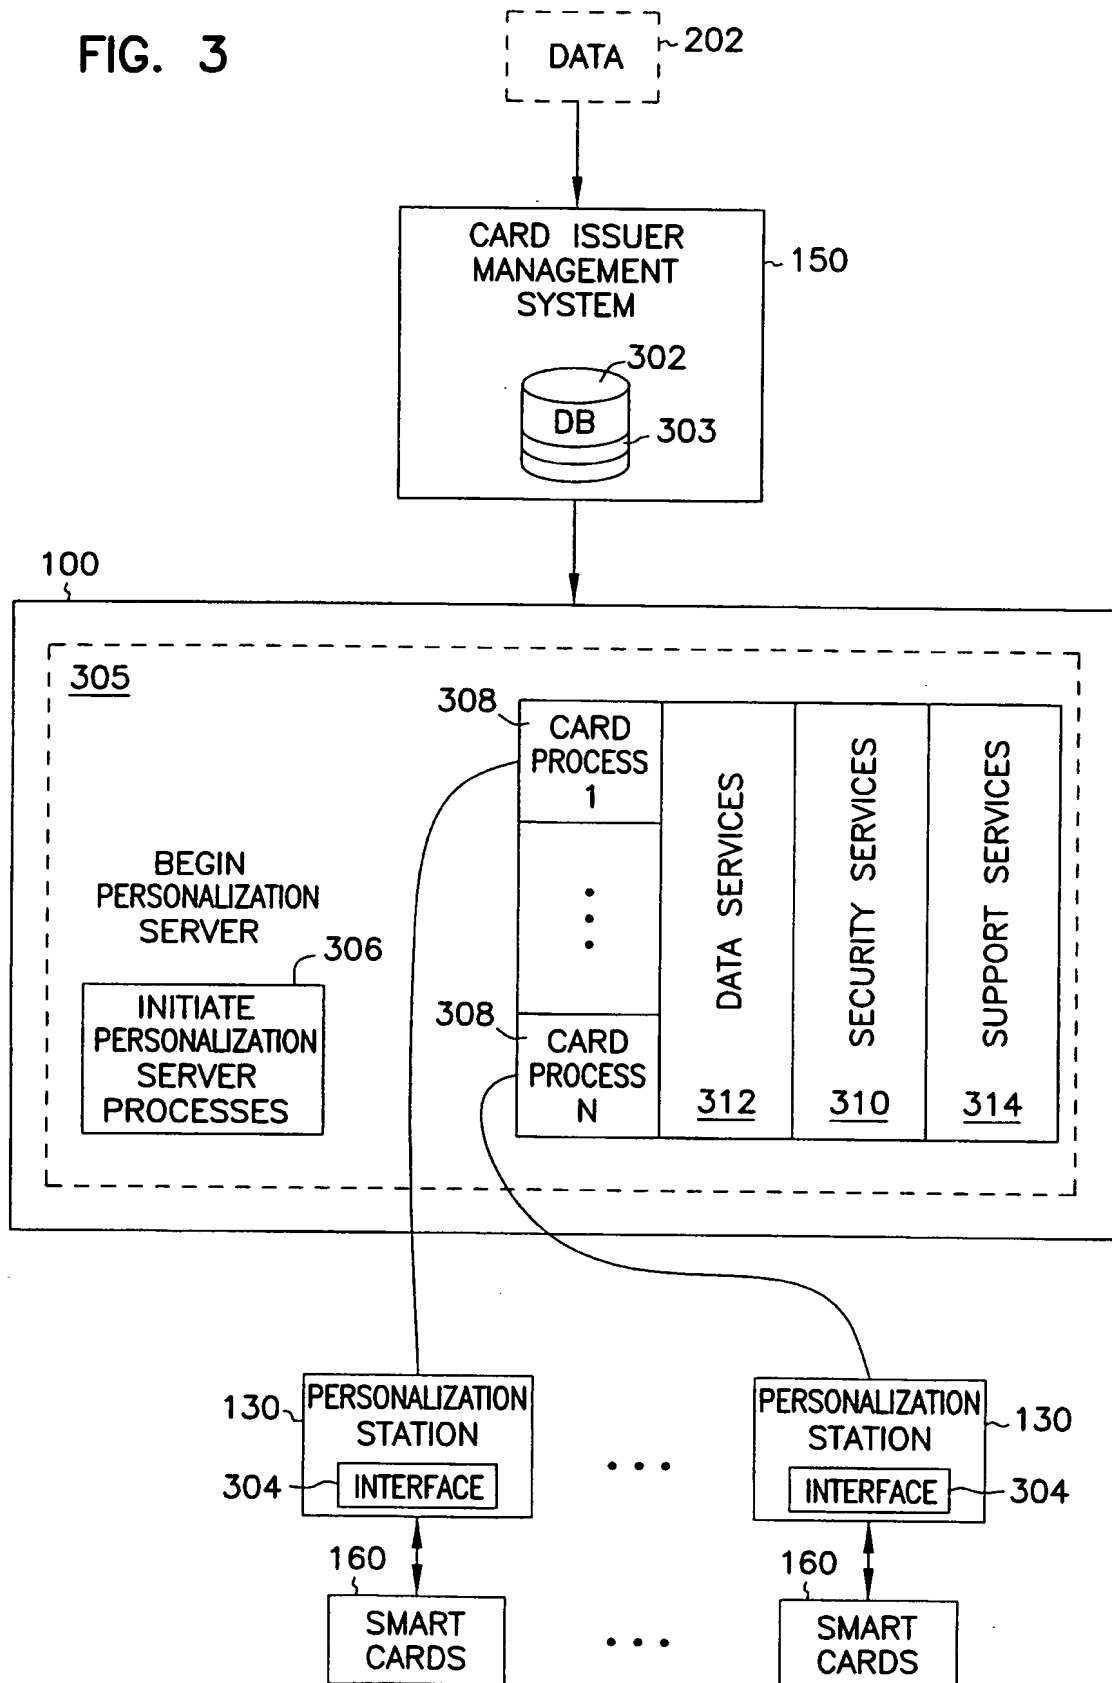


FIG. 2

3 / 4

FIG. 3



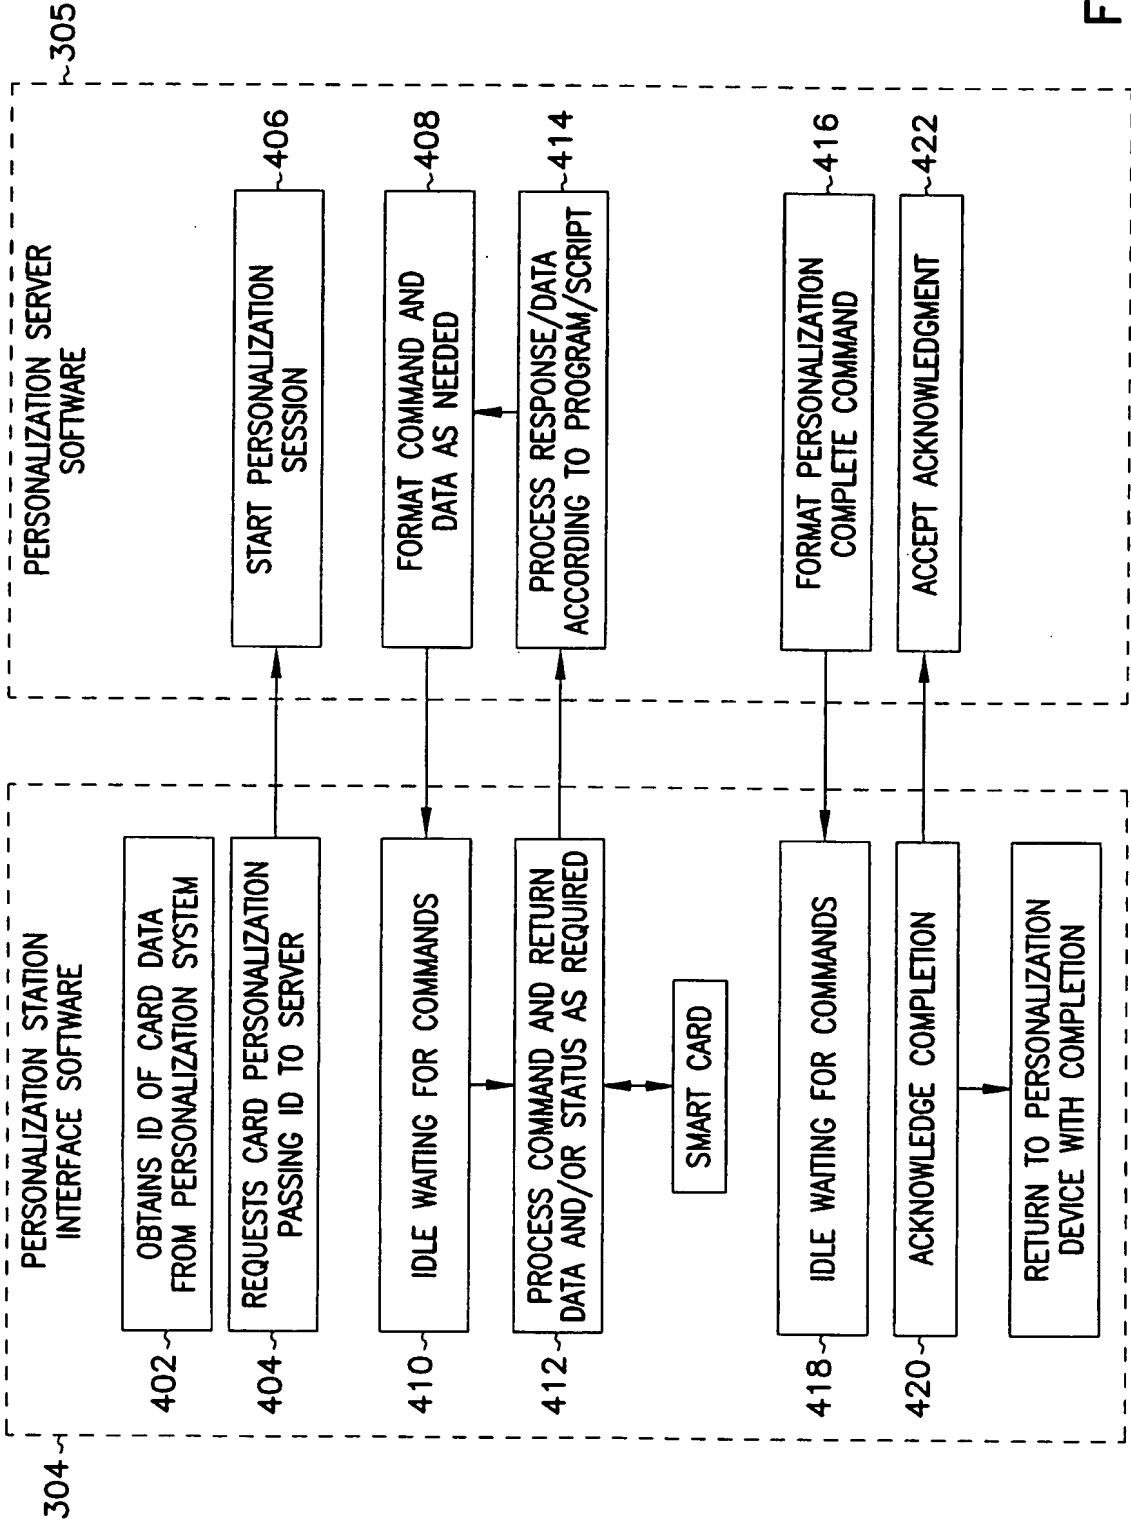


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/10328

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G07F7/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G07F G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 706 150 A (SERPEINESM SA) 10 April 1996 (1996-04-10)	1-3, 15, 17, 18, 20, 21, 23, 24, 26
Y	abstract column 1, line 42 - column 3, line 53 column 4, line 52 - column 5, line 52 figures 1-3 --- -/--	10, 11, 16, 19, 22, 25

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 August 1999

Date of mailing of the international search report

10/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Miltgen, E

INTERNATIONAL SEARCH REPORT

national Application No

PCT/US 99/10328

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 95 22810 A (TELIA AB ;CARLSSON JAN (SE); HOEGLUND PER (SE); SKAGERBERG JESPER) 24 August 1995 (1995-08-24)	1-4,6, 15,21,26
Y	abstract page 4, line 28 - page 9, line 1 page 16, line 2 - page 17, line 29 page 29, line 20 - page 41, last last claims 1-4; figures 1-5 ---	5,7-9, 27, 29-32,35
Y	WO 98 09257 A (GEMPLUS CARD INT) 5 March 1998 (1998-03-05) abstract page 7, line 12 - page 8, last last page 16, line 10 - page 18, line 20; claim 1; figure 4 ---	10,11, 27, 29-32,35
Y	WO 97 39424 A (UBIO INC) 23 October 1997 (1997-10-23) page 3, line 9 - page 6, last last page 10, line 4 - page 15, line 9 claims 1-11; figures 1,2 ---	5,7-9, 16,19, 22,25
A	US 5 534 857 A (LAING SIMON G ET AL) 9 July 1996 (1996-07-09) abstract column 1, line 44 - column 7, line 25 claims 1-6; figures 1-3 ---	1-35
A	WO 98 18106 A (GKARD S A S) 30 April 1998 (1998-04-30) abstract page 6, line 11 - page 9, last last page 21, line 3 - page 26, line 16 figures 5-16 -----	1-3,10, 15,21, 26-31

INTERNATIONAL SEARCH REPORT

Information on patent family members

I. International Application No

PCT/US 99/10328

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0706150 A	10-04-1996	FR 2725540 A JP 8212310 A US 5799316 A	12-04-1996 20-08-1996 25-08-1998
WO 9522810 A	24-08-1995	SE 502424 C EP 0745247 A SE 9400534 A	16-10-1995 04-12-1996 18-08-1995
WO 9809257 A	05-03-1998	US 5923884 A AU 4842897 A CA 2233217 A EP 0858644 A	13-07-1999 19-03-1998 05-03-1998 19-08-1998
WO 9739424 A	23-10-1997	US 5889941 A AU 2729897 A CA 2251689 A EP 0894312 A NO 984821 A	30-03-1999 07-11-1997 23-10-1997 03-02-1999 15-12-1999
US 5534857 A	09-07-1996	AU 656245 B WO 9310509 A EP 0722596 A FI 942177 A NO 941774 A	27-01-1995 27-05-1993 24-07-1996 11-05-1994 11-05-1994
WO 9818106 A	30-04-1998	FR 2758197 A	10-07-1998